



INSTITUTO FEDERAL DE SERGIPE

Campus São Cristóvão

Curso: Manutenção e Suporte em Informática

Prof. Dr. Luiz Carlos Pereira Santos

CONFIGURANDO O ACTIVE DIRECTORY 2008 SERVER +

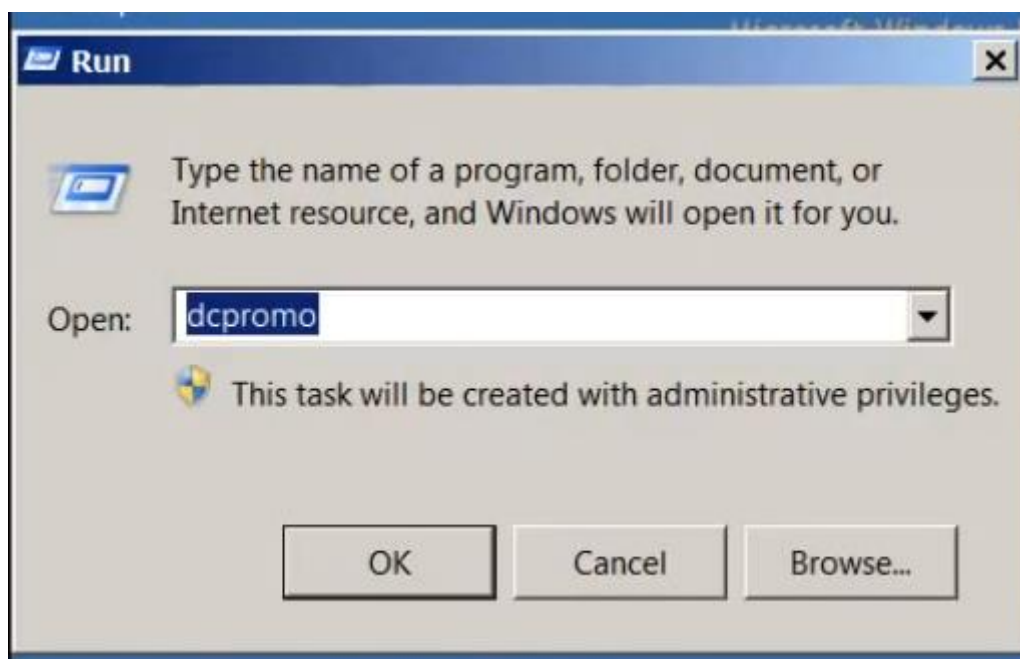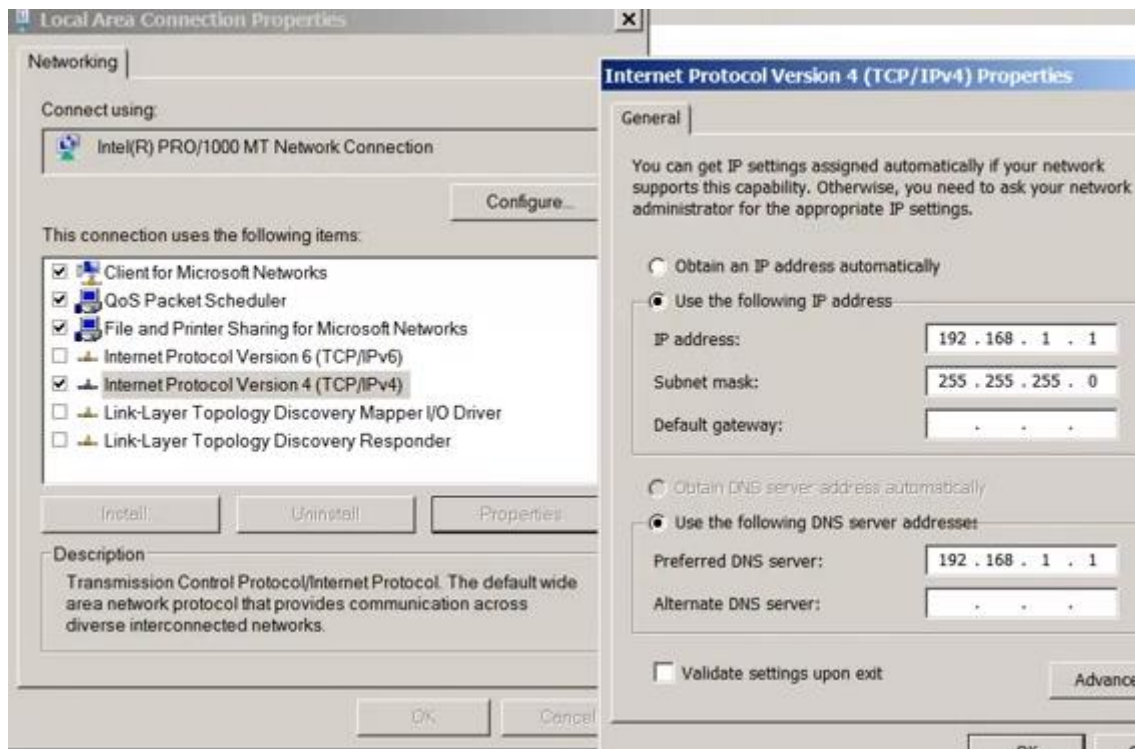

☐ Create a new domain tree root instead of a new forest

☒ Create a new domain in a new forest

More about [possible deployment configurations](#)

Active Directory Domain Services Installation Wizard

Name the Forest Root Domain
The first domain in the forest is the forest root domain. Its name is also the name of the forest.

Type the fully qualified domain name (FQDN) of the new forest root domain.

FQDN of the forest root domain:

lturmaredes2017

Example: corp.contoso.com

Active Directory Domain Services Installation Wizard

Set Domain Functional Level
Select the domain functional level.

Domain functional level:

Windows Server 2003

Details:

Additional Domain Controller Options

Select additional options for this domain controller.

- ☒ DNS server
- ☒ Global catalog
- ☐ Read-only domain controller (RODC)

For better performance and recoverability, store the database and log files on separate volumes.

Database folder:

C:\Windows\NTDS

Browse...

Log files folder:

C:\Windows\NTDS

Browse...

SYSVOL folder:

C:\Windows\SYSVOL

Browse...

Directory Services Restore Mode Administrator Password

The Directory Services Restore Mode Administrator account is different from the domain Administrator account.

Assign a password for the Administrator account that will be used when this domain controller is started in Directory Services Restore Mode. We recommend that you choose a strong password.

Password:

••••••

Confirm password:

••••••

INSTALAÇÃO DO DNS

Active Directory Domain Services Installation Wizard

The wizard is configuring Active Directory Domain Services. This process can take from a few minutes to several hours, depending on your environment and the options that you selected.



Installing Group Policy Management Console...





Cancel


☐ Reboot on completion



OUTRA MANEIRA

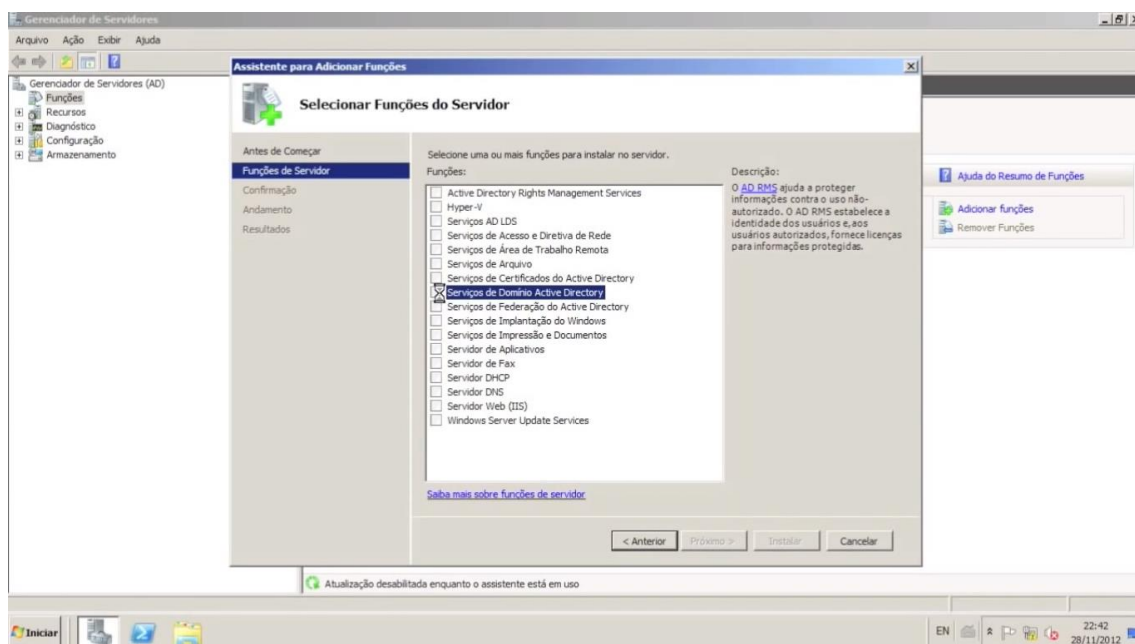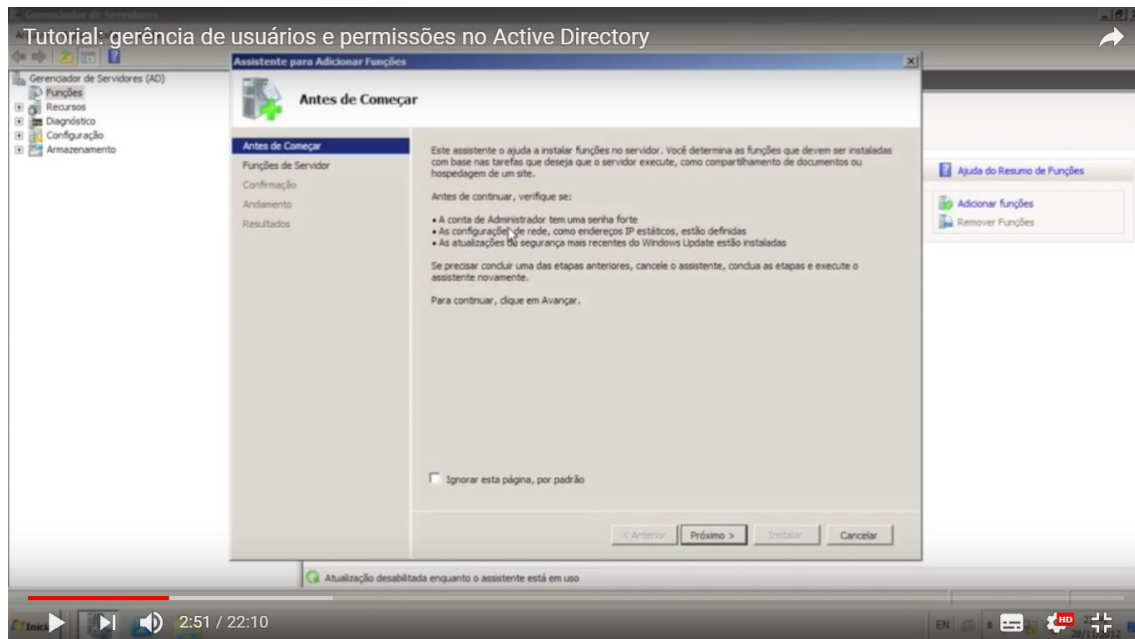

CRIANDO COMPUTADOR

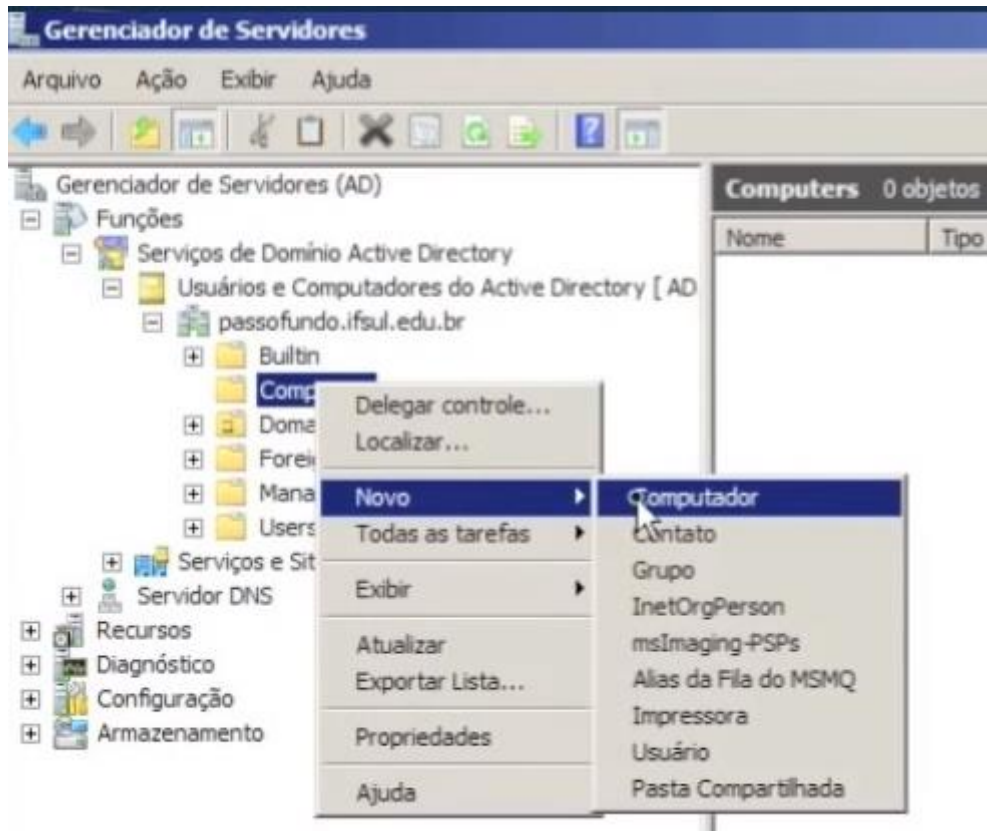

CRIANDO USUÁRIO



CONFIGURANDO O CLIENTE

A PARTIR DE MEU COMPUTADOR + PROPRIEDADES

